


**Type RP73 Series**

**Type RP73 Series**



The RP73 Series is a stable thin film chip resistor range offering various power dissipation relating to chip size. The resistor is produced with three print layers for longer life and optimum performance. Values are restricted to E96 and the RP73 has accurate and uniform physical dimensions to reduce placement problems. The range is constantly being extended. Due to special technology used to produce tight tolerance, low TCR at high values the RP73 is not individually part marked.

**Key Features**

- High Precision - TCR 10ppm/°C
- Tolerance Down to 0.05%
- Wider Resistance Value Options
- Supplied on Reels of 1000 or 5000
- Thin Film (Nichrome)
- Stable High Frequency Performance
- 200 V DC Operating Voltage
- Temperature -55°C to +155°C

**Characteristics - Electrical**


Type	T.C.R's Available per Resistance Value (ppm/°C)				
	5R1 - 10R	10R1 - 47R	47R1 - 332K	332K1 - 1M0	1M1 - 5M
RP73 1J	-	25/50	10/15/25/50	-	-
RP73 2A	-	25/50	10/15/25/50	10/15/25/50	-
RP73 2B	50	25/50	10/15/25/50	10/15/25/50	50

Type	Tolerances Available per Resistance Value (%)				
	5R1 - 10R	10R1 - 100R	101R1 - 332K	332K1 - 1M0	1M1 - 5M
RP73 1J	-	0.1/0.25/0.5/1.0	0.1/0.25/0.5/1.0	-	-
RP73 2A	-	0.1/0.25/0.5/1.0	0.05/0.1/0.25/0.5/1.0	0.1/0.25/0.5/1.0	-
RP73 2B	1.0	0.1/0.25/0.5/1.0	0.05/0.1/0.25/0.5/1.0	0.1/0.25/0.5/1.0	0.25/0.5/1.0

Type	Power Rating @ 70°C	Max. Working Voltage
RP73 1J	0.065 W	30V
RP73 2A	0.125 W	75V
RP73 2B	0.250 W	200V

Long Term Stability	100R - 100K	<100R1, 100K+
Storage 125°C/1000Hrs	<0.15%	<0.35%
Storage 155°C/1000Hrs	<0.35%	<0.50%
Load P70/70°C/1000Hrs	<0.15%	<0.50%
Damp Heat (56d/40°C/96%)	<0.50%	<0.75%


**Power Derating Curve**

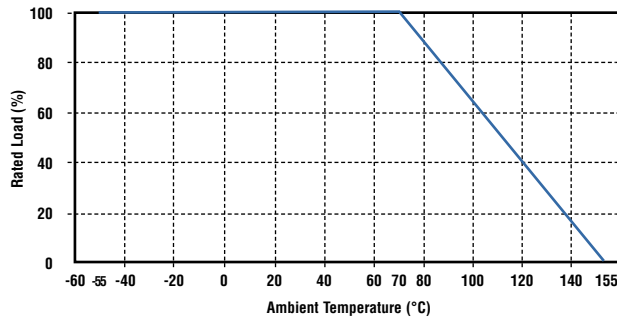

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with this curve.

**Type RP73 Series**

**Dimensions**

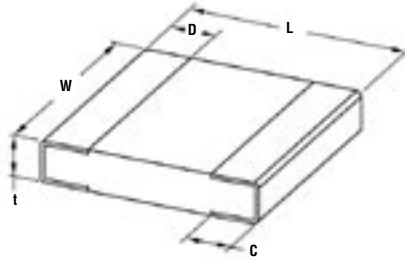

Part Number	L ±0.2	W	C	D	t ±0.1
<b>RP73 1J</b>	1.6	0.8±0.1	0.3±0.1	0.3 ± 0.1	0.4
<b>RP73 2A</b>	2.0	1.25±0.2	0.4±0.2	0.3 ± 0.2	0.4
<b>RP73 2B</b>	3.2	1.6±0.2	0.5±0.2	0.4 ± 0.2	0.6

Solderability - 235°C 2 seconds  
 DIN IEC 68T2 - 20 Ta Meth. 1  
 Max Soldering Temperature - 260°C 10 seconds  
 DIN IEC 68 T2 - 20, Tb Meth. 1A

**Handling Recommendations**

When flow soldering - the land width must be smaller than the chip resistor width to properly control the solder application. Generally, the land width can be chip resistor width (W) x 0.7 to 0.8. When reflow soldering - solder application amount can be adjusted.  
 Thus the land width can be set to W x 1.0 to 1.3.

**How to Order**

RP73	C	2A	1K0	B	TN
Common Part	Temp. Coefficient	Package Size	Resistor Value	Tolerance	Packaging
RP73 - Standard Part	C - 10ppm/°C	1J - 06:03	10 Ohm (10 ohms)	B - 0.1%	TN - 1000 TD - 5000
	D - 15ppm/°C		10R		
	F - 25ppm/°C	2A - 08:05	1K Ohm (1000 ohms)	C - 0.25%	
	G - 50ppm/°C	2B - 12:06	1K0	D - 0.5%	
			1 Meg Ohm (1000000 ohms)	F - 1%	
			1M0		